



# NETYS PR

Space saving reliable protection  
from 1000 to 2000 VA - Mini Tower

Single-phase UPS



NETYS PR  
1000 VA

NETYS PR  
1500/2000 VA

GAMME 258 A

## The solution for

- > Professional and IT equipment
- > Servers and networking devices
- > CAD / graphic workstations with monitors and peripherals
- > Control systems

## Technology

- > VI "line interactive" with AVR, sine wave

## Certifications



### Professional line interactive UPS

- Ideal solution for protecting small servers and high performance CAD or graphic workstations.
- Assures service continuity to critical applications.
- Designed for professional applications: the sine wave inverter technology assures full compatibility with any kind of load and power supply.
- Minitower case to easily fit close to the IT load to be supplied and protected.

### A solution for network power cuts and voltage fluctuations

- The integrated AVR function (Automatic Voltage Regulation) stabilizes the output voltage and avoids the switching to Battery Mode operation, therefore saving the battery to support critical power cut events.

### Easy to use

- Control panel with graphical icons LCD allowing the operating mode to be easily monitored.


### Simplified connection

- Several IEC 320 sockets (IT standard) simplify the connectivity to computer and IT peripherals.

### Protection for your data line

- Integrated NTP protection for LAN/ADSL connection against the risk of data line overvoltage.

### Connections

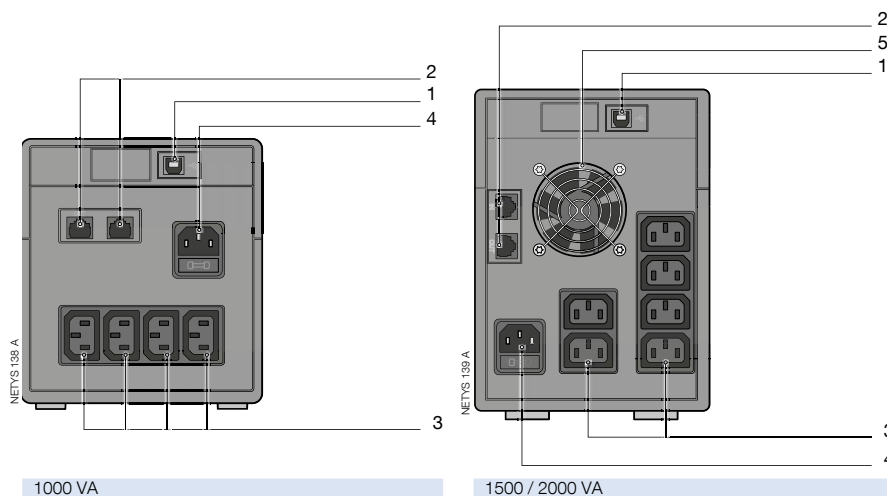


1000 VA

1500 / 2000 VA

1. USB serial port
2. NTP data line suppressor
3. UPS output sockets

4. Input socket and fuse
5. Fan / air vents

### Control panel

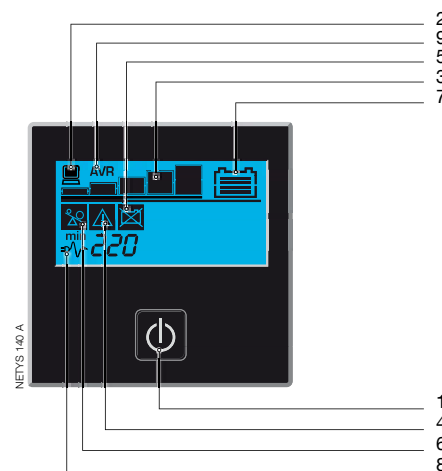

1. On / Off
2. Load present
3. Load level (5 steps)
4. General Alarm
5. Battery fault / Replace the battery
6. Overload
7. Battery capacity
8. Normal mode / Battery mode (flashing)
9. Automatic Voltage / Regulation active

### Technical data

| NETYS PR Mini Tower                |   |                    |         |
|------------------------------------|---|--------------------|---------|
| Sn                                 | 1000 VA   | 1500 VA            | 2000 VA |
| Pn                                 | 700 W   | 1050 W             | 1400 W  |
| Input / output                     | 1/1   |                    |         |
| <b>INPUT</b>                       |   |                    |         |
| Rated voltage                      | 230 V   |                    |         |
| Voltage tolerance                  | 170 - 280 V   |                    |         |
| Rated frequency                    | 50/60 Hz with automatic selection                           |                    |         |
| Mains connection                   | IEC320 socket   |                    |         |
| <b>OUTPUT</b>                      |   |                    |         |
| Automatic Voltage Regulation (AVR) | •   | •                  | •       |
| Rated voltage                      | 230 V ±10%  |                    |         |
| Rated frequency                    | 50/60 Hz ±1%  |                    |         |
| Wave form                          | Sine wave   |                    |         |
| Protection                         | Overload, significant discharge and short circuit           |                    |         |
| Connections                        | 4 x IEC 320 (C13)   | 6 x IEC 320 (C13)  |         |
| <b>BATTERIES</b>                   |   |                    |         |
| Type                               | Sealed lead-acid maintenance free - expected life 3/5 years |                    |         |
| Back-up time <sup>(1)</sup>        | 45 min  | 55 min             | 60 min  |
| <b>COMMUNICATION</b>               |   |                    |         |
| Interfaces                         | USB   |                    |         |
| Local communication software       | Local View  |                    |         |
| Data Line protection               | NTP data line suppressor                                    |                    |         |
| <b>UPS CABINET</b>                 |   |                    |         |
| Dimensions W x D x H               | 145 x 345 x 165 mm  | 145 x 390 x 205 mm |         |
| Weight                             | 9.2 kg  | 12.3 kg            | 13.2 kg |
| <b>STANDARDS</b>                   |   |                    |         |
| Safety                             | IEC/EN 62040-1, AS 62040.1.1, AS 62040.1.2                  |                    |         |
| EMC                                | IEC/EN 62040-2, AS 62040.2                                  |                    |         |
| Product declaration                | CE, RCM (E2376)   |                    |         |

(1) PC + 17" LCD monitor.

### Standard communication features

- LOCAL VIEW: ideal UPS monitoring and shutdown point-to-point solution for Windows®, Linux and Mac OS X® operating systems.